

PLAN SYMBOLS	
MB, TB	TACKBOARD, MARKERBOARD. LENGTHS AS SHOWN ON PLANS. SEE 9 /A-601 FOR DETAILS.
FE	WALL MOUNTED FIRE EXTINGUISHER- SEE SPECIFICATION, & DETAIL 6 /A-601
FEC	RECESSED FIRE EXTINGUISHER CABINET- SEE SPECIFICATION, & DETAIL 6 /A-601

FIRST FLOOR PLAN NOTES	
1	CONTRACTOR TO PROVIDE AND INSTALL BOOK LOCKERS, TO BE SELECTED BY OWNER. AS DESCRIBED IN DIVISION 1 SPECIFICATIONS "ALLOWANCE #3"
2	BOOK SORTING SYSTEM. SEE ALLOWANCE #1 IN SPEC
3	WALL MOUNTED DIGITAL DISPLAY UNIT. SEE ALLOWANCE #5 IN THE SPEC.
4	NOT USED.
5	4'X8' FIRE RATED PLYWOOD ON ALL INTERIOR WALLS OF ROOM
6	PROVIDE SS RAILING SYSTEM. TOP RAIL IS TO BE 1 1/2" SS PIPE. POSTS ARE TO BE 2 1/2" X 1/2" FLAT BAR @ MAX 5'-0" OC. SADDLES TO BE 5/8" SS ROUND BARS. SEE SPECIFICATION.
7	INSULATED OVERHEAD COILING DOOR OVER BOOK LOCKERS. SEE SPEC.
8	LEED PLAQUE AND BUILDING DEDICATION PLAQUE. SEE A-490

GENERAL FLOOR PLAN NOTES	
1.	THE FOLLOWING FLOOR PLANS CONTAIN ROOF PLAN INFORMATION: A-102, A-103, A-105, A-106, & A-107.
2.	EXPOSED STEEL COLUMNS TO RECEIVE INTUMESCENT PAINT UNLESS NOTED OTHERWISE ON DRAWINGS. STEEL COLUMNS WITHIN GYP ENCLOSURES TO RECEIVE SPRAY-ON FIREPROOFING.
3.	PROJECTION SCREENS ARE SHOWN ON THE A- 120 SERIES.
4.	REFER TO THE FOLLOWING A-SERIES DWGS FOR GLASS ASSEMBLIES: A-720 SERIES- CURTAIN WALL, A-750 SERIES- STOREFRONT, A-740 SERIES-ALL GLASS WINDOW ASSEMBLIES
5.	FOR ALL LOCATIONS WHERE CONSTRUCTION (CW SF ROOFING, GYP BD PARTITIONS, WINDOW ASSEMBLIES, METAL PANELS, FLASHING, ETC) INTERSECTS THE TEXTURED CAST STONE BANDS, PROVIDE 12"X12"X4" NOM SMOOTH CAST STONE IN LIEU OF TEXTURED CAST STONE IN A VERTICAL CONDITION AND 12"X12"X4" NOM IN A HORIZONTAL CONDITION FOR AS MANY COURSES AS REQUIRED FOR A FLUSH INSTALLATION
6.	EVERY OUTSIDE DRYWALL CORNER TO RECEIVE A SS CORNER GUARD TO 48" AFF
7.	SEE IG SERIES FOR CHAIR RAIL LOCATIONS
8.	EXCEPT FOR THE BASEMENT AND 2ND FLOOR, ALL EXPOSED STEEL BEAMS ARE TO RECEIVE INTUMESCENT PAINT. WHERE ONLY A PORTION OF A BEAM IS EXPOSED, THE ENTIRE BEAM IS TO RECEIVE INTUMESCENT PAINT. THE BEAMS ON THE 2ND FLOOR AND BASEMENT ARE TO RECEIVE SPRAY
9.	SEE ELEVATIONS FOR CJ LOCATIONS OF CAST STONE
10.	SEE GC SERIES AND A-750 SERIES DRAWINGS FOR WALL TYPE INFORMATION ABOVE SF ASSEMBLIES FOR THE 1 HOUR RATED WALL ATRIUM SEPERATION WALL SCOPE.
11.	INSTALL 4'X8' FIRE RATED PLYWOOD SHEETS ON ALL INTERIOR WALLS OF ALL IT AND SERVER ROOMS UP TO 8' AFF.



MONTGOMERY COUNTY MARYLAND
 DEPARTMENT OF GENERAL SERVICES
 DIVISION OF BUILDING DESIGN AND CONSTRUCTION
 101 MONROE STREET 11TH FLOOR
 ROCKVILLE, MARYLAND 20850

Silver Spring Library Building
IFB # 1019962
Bid Submission
August 20, 2012
 900 Wayne Avenue
 Silver Spring, Maryland 20910

The Lukmire Partnership
 Architecture
 Planning
 Interior Design
 2700 South Quincy Street
 Suite 300
 Arlington, VA 22206
 703-998-0101
 fax 703-998-7798


Professional Certification.
 I certify that these documents were prepared or approved by me, and that I am a duly licensed architect under the laws of the state of Maryland, license number 7545-R, expiration date 3/16/13.

REGISTRATION:

NO	DATE	ISSUE DESCRIPTION
1	9/18/12	ADDENDUM #1
2	10/18/12	ADDENDUM #3
3	4/5/2013	ASI 011 - Revise enclosures around 1st floor vertical ducts
4	6/21/2013	CCD 010 - revise doors and door hardware
5	3/27/2014	CCD 055 - book drop changes & coiling doors @ book lockers
6	4/15/2014	CCD 038 - contract revisions resulting from furniture meetings
7	4/28/2014	ASI 040 - Vestibule elevations - plaques and FP panels

A/E PROJECT NO: 13230
 DRAWN BY: BFE
 CHECKED BY: RZP

KEY PLAN

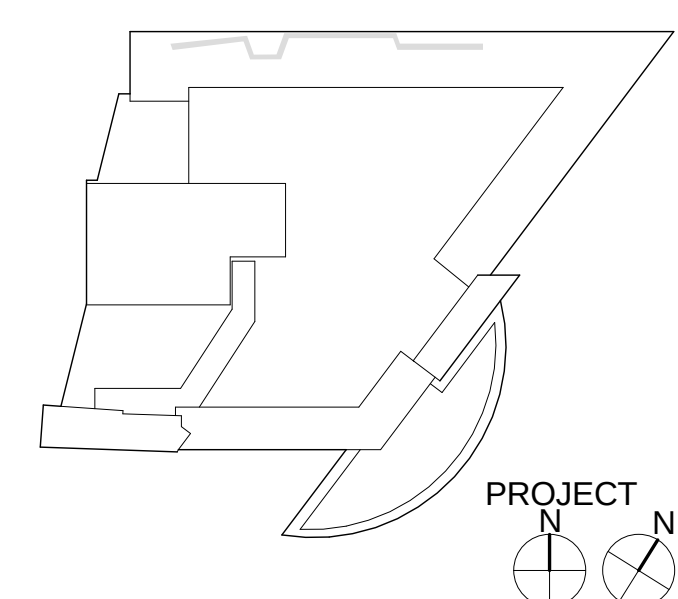

SHEET TITLE:
FIRST FLOOR PLAN

SHEET NUMBER:
A-101

Original drawing is 30" x 42". Scale entities accordingly if reduced.
 S:\000004\A-101.dwg