



## Thayer Avenue Overlay Project

### Full-Depth Permanent Pavement Patching to Begin Soon

#### PURPOSE

This newsletter is to inform you of the upcoming full-depth permanent pavement patching project on Thayer Avenue, from Georgia Avenue to Dale Drive, in Silver Spring. This pavement system preservation project employs long-term strategies to preserve and enhance the physical and operating conditions of the roadway system as it exists, and ensures a system serviceable for many years.

#### BACKGROUND

The Montgomery County Department of Transportation, (MCDOT) Division of Highway Services (DHS) maintains nearly 5,200 lane miles of streets and highways using various methods of routine maintenance, pavement preservation, and repaving depending on the level of pavement deterioration present. An annual survey of county roads is conducted to assess the pavement condition of each road within the county. A Pavement Condition Index (PCI) is then calculated for each road segment. Using this PCI data, MCDOT determines the appropriate repair strategy for each road given available funding. Part of Montgomery County's Pavement Management System includes structural permanent patching, which is a cost-effective interim solution to maintain roadway structural integrity based on current funding allocations.

#### SCOPE OF PROJECT

Overall, the pavement conditions in your community were generally rated as fair, with some areas described as needing more attention. This rating meets the criteria for roadway preservation using Hot Mix Asphalt



Typical survey paint markings

(HMA) full-depth permanent patching.

#### PROJECT WORK PLAN

You may have noticed paint markings that outline areas for pavement replacement. The markings enable us to estimate the quantity of asphalt needed for full-depth patching and provide the locations of the distressed pave-

ment. Crews will excavate the distressed pavement with a pavement milling machine



Milling machine patch excavating

or Gradall excavator.

#### Full-Depth Permanent Patching

Areas of pavement distress are excavated and replaced with hot mix asphalt. This method is used in isolated areas where pavement failures extend through the road base. Full-depth patching restores the pavement's structural integrity and capacity to support vehicle loads. Further, patching will prevent water from infiltrating through the pavement and into the underlying road base, which exacerbates the degree and extent of pavement deterioration. Failing pavement conditions are dynamic in nature and will worsen, nearly exponentially, under conditions such as harsh winters and wet summers. Patching with HMA will yield a service life of between 15-20 years.

There are 2 phases to full-depth patching:

First, the pavement is excavated. Then, HMA base material is replaced in 2 layers and compacted with a steel-wheeled roller. The patch is left approximately one-and-one-half (1 ½) inches below the existing road surface to allow room for a layer of smooth surface HMA to be applied at a later time (within a few days).

Second, the surface HMA is placed either by machine or by hand, depending on the size of the patch, into the depression left by the base asphalt work. The asphalt is then compacted using a steel-wheeled roller. The final surface of the patch will match the level of the existing roadway and provide for a smooth ride.

**MCDOT and the WSSC will be completing the pavement patching and resurfacing repairs. MCDOT will perform the full depth permanent patching followed by WSSC milling and resurfacing the entire project limits as required under their county permit.**

#### SCHEDULE

The patching project is scheduled to begin in

mid to late April 2017, and will be completed within 1 to 2 weeks, weather permitting. Work hours are from 7 am to 5 pm, Monday through Friday.

#### IMPACTS

Street patching will necessitate daily short-term parking restrictions. "No Parking" signs will be posted to notify residents of the planned dates for patching. Parking restrictions are only valid from 7 am to 5 pm. Please pay close attention to the dates on the



New asphalt is placed and compacted

signs as weather may delay the planned work. Our intent is to maintain continuous traffic at all times utilizing lane closures and/or alternating one-way traffic patterns. However, minor traffic delays and brief daily road closures may be experienced if deemed necessary. Signs will be posted identifying such restrictions.

Access to residences will be available at all times; however, minor delays may be experienced as workers restrict traffic from freshly



New patch is flush with existing pavement

placed hot mix asphalt.

Generally speaking, this work is best characterized as noisy and disruptive. However, MCDOT will take all necessary steps to mitigate any inconveniences this work may cause. Quality control for the project will be managed by County inspection staff to ensure the project meets contract specifications.

*Thank you for your cooperation as we work to improve the county infrastructure for residents and users!*



## MONTGOMERY COUNTY, MARYLAND

DEPARTMENT OF TRANSPORTATION

DIVISION OF HIGHWAY SERVICES

100 EDISON PARK DRIVE, 4TH FLOOR, GAITHERSBURG, MD 20878

240-777-ROAD (7623)

[www.montgomerycountymd.gov/DOT-Highway/](http://www.montgomerycountymd.gov/DOT-Highway/)

### KEEPING MONTGOMERY MOVING

MCDOT NEWS No. 2017.2

# NOTICE OF THAYER AVENUE PERMANENT PATCHING PROJECT IN SILVER SPRING

#### SAFETY NOTICE

Please drive gently and safely through the work site and kindly remember that while repair work is underway, personnel and construction vehicles will be moving around the site. Some materials may be stored in the area. Please use caution when walking or driving through the construction zone. Children may be attracted to the noise and machinery, so we ask that you please keep all children under close supervision at all times, even after the work is completed for the day. Also, please follow the direction of flagmen and temporary signs and traffic control devices. We appreciate your patience and cooperation while we make these much-needed improvements to the infrastructure. *If, for some reason, you have a medical condition that could be potentially impacted by the construction activities, please alert the Project Manager listed below or Josh Faust, Public Outreach Manager, at 240-777-7642.*

#### DIVISION OF HIGHWAY SERVICES

Richard C. Dorsey  
Division Chief

Randy Paugh, Chief  
Pavement Management Section


<b>MCDOT Project Manager:</b>	James Kisner	240-777-7631
<b>MCDOT Program Manager:</b>	Donald Noble	240-777-7601
<b>WSSC Contract Manager:</b>	Suzette Duvall	301-206-8041

Should your questions be of a more general nature, please contact the  
MC311 Call Center by dialing 311 or 240-777-0311

**DHS Email:** [mcdot.highway@montgomerycountymd.gov](mailto:mcdot.highway@montgomerycountymd.gov)

**DHS Website:** [www.montgomerycountymd.gov/DOT-Highway/](http://www.montgomerycountymd.gov/DOT-Highway/)

On the county map, click on the **Silver Spring** Service Area, where you  
will find additional roadway maintenance projects scheduled in your area.

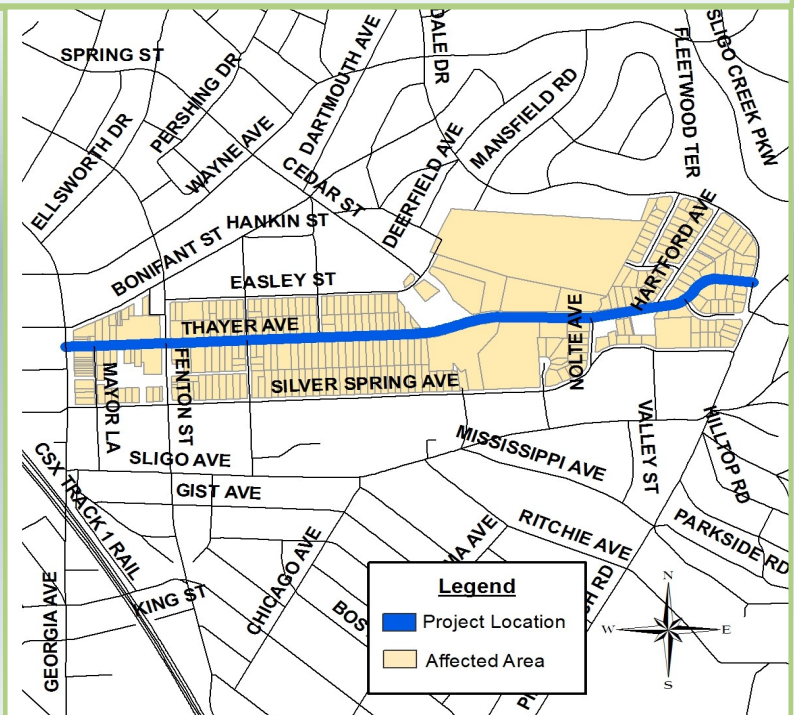

@MontCo\_Highways



mocohighwayservices