



PRIMARY PAVING

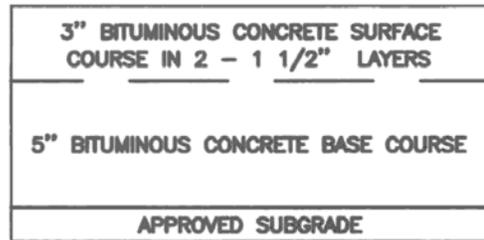

ALTERNATE PAVING

GENERAL NOTES

1. REFER TO MARYLAND STATE HIGHWAY ADMINISTRATION SPECIFICATIONS FOR MATERIALS AND METHODS OF CONSTRUCTION.
2. EXPANSION JOINT MATERIAL SHALL BE PLACED ALONG THE PROPERTY LINE WHEN ABUTTING CONCRETE STRUCTURES.
3. EXPANSION JOINT MATERIAL SHALL HAVE A MAXIMUM LONGITUDINAL SPACING OF 100 FEET. THE MATERIAL SHALL BE 1/2 INCH PREFORMED CORK, TRIMMED AND SEALED WITH NON-STAINING, TWO-COMPONENT POLYSULFIDE OR POLYURETHANE ELASTOMERIC TYPE SEALANT COMPLYING WITH ASTM-C920. 
4. SCORE THE CONCRETE TO A DEPTH OF 1/3 THE SLAB THICKNESS TO PROVIDE WEAKENED PLANE TRANSVERSE JOINTS AT 10'-0" MAXIMUM INTERVALS.

APPROVED <u>14 APR 06</u> DATE  DIRECTOR, DEPT. OF PUBLIC WORKS & TRANSPORTATION  CHIEF, DIV. OF CAP. DEV.	REVISED  ASTM-C920 4/2006	MONTGOMERY COUNTY DEPARTMENT OF PUBLIC WORKS & TRANSPORTATION
	COMMERCIAL ALLEY	STANDARD NO. MC-201.01