


X

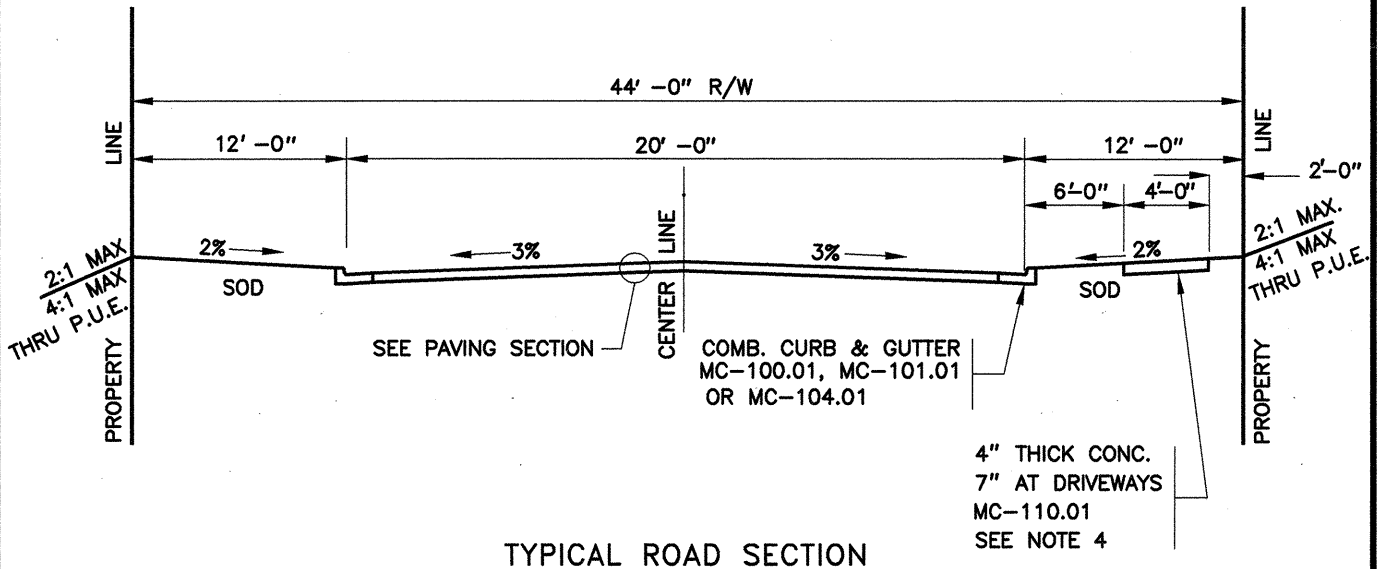

3" BITUMINOUS CONCRETE SURFACE COURSE IN 2 - 1 1/2" LAYERS
3" BITUMINOUS CONCRETE BASE COURSE
APPROVED SUBGRADE

PAVING SECTION
GENERAL NOTES

1. REFER TO MARYLAND STATE HIGHWAY ADMINISTRATION SPECIFICATIONS FOR MATERIALS AND METHODS OF CONSTRUCTION.
2. SEE STANDARD NO. MC-811.01 - METHODS OF GRADING SIDE SLOPES.
3. TOP OF CURB ELEVATION = CENTERLINE ELEVATION + 0.11' (FOR 6" CURB HEIGHT).
4. THIS STANDARD CAN BE USED FOR CUL-DE-SAC LESS THAN 300' IN LENGH AND WITH ON STREET PARKING ALLOWED ON ONE SIDE ONLY.
5. THIS STANDARD CAN BE USED FOR ONE WAY LOOP STREETS WITH ON STREET PARKING ALLOWED ON ONE SIDE ONLY.
6. SIDEWALK OBSTRUCTIONS THAT VIOLATE THE CLEARANCE REQUIREMENTS OF THE "AMERICANS WITH DISABILITIES ACT" OF 1990 WILL NOT BE ALLOWED.
7. THIS STANDARD SHALL NOT BE USED WHERE ANY CLASS OF BIKEWAY IS SPECIFIED.
8. WHEN A TRAFFIC BARRIER IS WARRANTED INCREASE THE RIGHT OF WAY TO ALLOW THE TRAFFIC BARRIER TO BE PLACED OUTSIDE OF THE SIDEWALK.

P:\DITSTD\MC21001 9-28-95 2:10:19 PM EST

APPROVED <u>JAN 5/96</u> DATE	REVISED	MONTGOMERY COUNTY DEPARTMENT OF TRANSPORTATION
<i>[Signature]</i> DIRECTOR, DEPT. OF TRANS.		TERTIARY RESIDENTIAL STREET 44' RIGHT-OF-WAY
<i>[Signature]</i> CHIEF DIV. OF ENG. SERVICES		STANDARD NO. MC-210.01