

TYPICAL ROAD SECTION

3" BITUMINOUS CONCRETE SURFACE COURSE IN TWO 1 1/2" LAYERS
7" BITUMINOUS CONCRETE BASE COURSE
8" GRADED AGGREGATE BASE COURSE IN TWO LAYERS
*
APPROVED SUBGRADE

PREFERRED

3" BITUMINOUS CONCRETE SURFACE COURSE IN TWO 1 1/2" LAYERS
9" BITUMINOUS CONCRETE BASE COURSE IN TWO 4 1/2" LAYERS
4" GRADED AGGREGATE BASE COURSE
*
APPROVED SUBGRADE

ALTERNATE


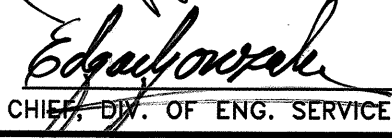
* SUBGRADE DRAINS REQUIRED SEE MC-525.01

PAVING SECTION

GENERAL NOTES

1. REFER TO MARYLAND STATE HIGHWAY ADMINISTRATION SPECIFICATIONS FOR MATERIALS AND METHODS OF CONSTRUCTION.
2. WHERE BUILDINGS ARE GENERALLY LOCATED AT THE PROPERTY LINE, THE SIDEWALK SHALL BE 15' WIDE HAVING A 5' WIDE BY 5' LONG OR (BY VARIABLE OR CONTINUOUS LENGTH) SPACE FOR TREE PLANTINGS.
3. OBSTRUCTIONS IN THE SIDEWALK THAT VIOLATE THE CLEAR WALKING SURFACE REQUIREMENTS OF THE "AMERICANS WITH DISABILITIES ACT" OF 1990 WILL NOT BE ALLOWED.
4. TOP OF CURB (LOW SIDE) ELEVATION = FLOWLINE (HIGH SIDE) ELEVATION - 0.67' (FOR 6" CURB HEIGHT).
5. THIS STANDARD PROVIDES TWO OR THREE TRAVEL LANES IN EACH DIRECTION.
6. WHEN A TRAFFIC BARRIER IS WARRANTED INCREASE THE RIGHT OF WAY TO ALLOW THE TRAFFIC BARRIER TO BE PLACED OUTSIDE OF THE SIDEWALK.

PA 3075TDN MC219.04 7-1-94 94109 am EST

APPROVED <u>JAN 5 / 96</u> DATE	REVISED	MONTGOMERY COUNTY DEPARTMENT OF TRANSPORTATION
 DIRECTOR, DEPT. OF TRANS.		COMMERCIAL/INDUSTRIAL DUAL ROAD
 CHIEF, DIV. OF ENG. SERVICES		120' RIGHT OF WAY
		STANDARD NO. MC-219.04