


ROADWAY CLASSIFICATION	A	B	C	D	E	F	G	H
TERTIARY	26'-0"	**	18'-0"	12'-0"	18'-0"	6'-0"	60'-0"	165'-0"
SECONDARY	26'-0"	17'-0"	18'-0"	16'-0"	18'-0"	8'-0"	90'-0"	195'-0"
PRIMARY	36'-0"	17'-0"	26'-0"	20'-0"	18'-0"	10'-0"	120'-0"	270'-0"
ARTERIAL	50'-0"	15'-0"	26'-0"	20'-0"	24'-0"	10'-0"	200'-0"	275'-0"
BUSINESS	50'-0"	15'-0"	26'-0"	20'-0"	24'-0"	10'-0"	120'-0"	165'-0"

** SEE MCDOT STANDARD MC-210.01 OR MC-210.02

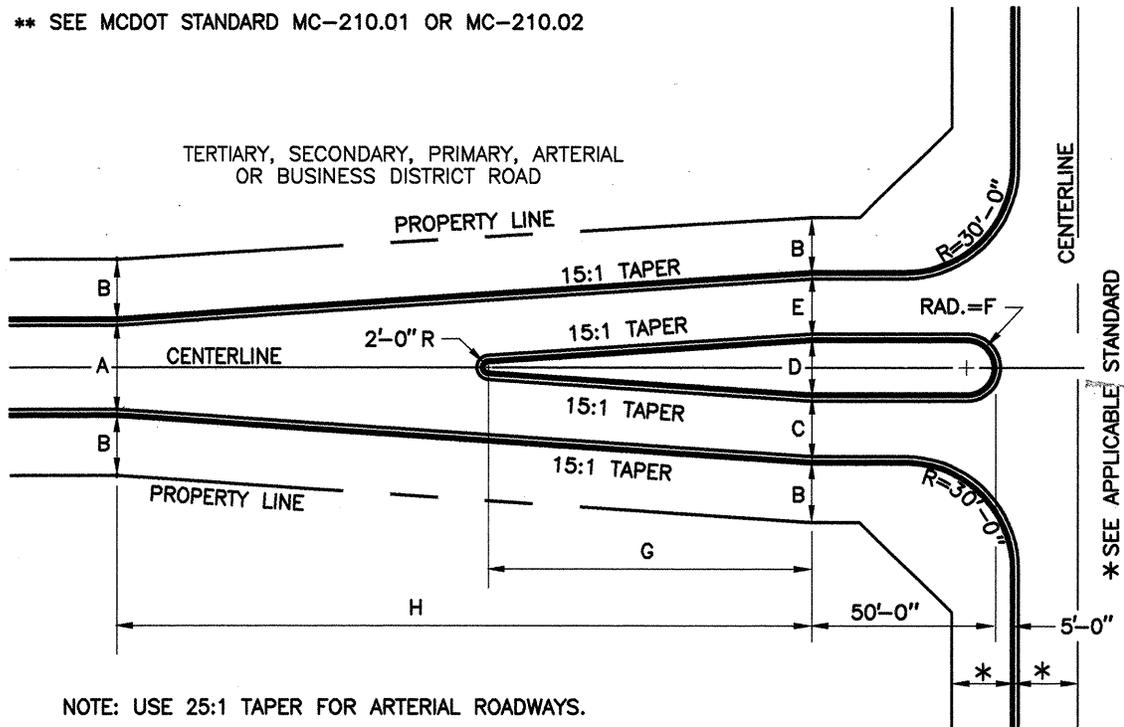

GENERAL NOTES

1. THIS STANDARD IS APPLICABLE TO INTERSECTIONS OF TERTIARY, SECONDARY, PRIMARY, ARTERIAL OR BUSINESS DISTRICT ROADS WITH OTHER ROADS HAVING THE SAME OR HIGHER CLASSIFICATION.
2. IN ALL CASES, THE MEDIAN SHALL BE CONSTRUCTED WITH MCDOT STANDARD MC-100.01 CONCRETE CURB AND GUTTER.
3. STREET TREE PLANTINGS SHALL BE IN ACCORDANCE WITH MCDOT STANDARD MC-700.01.
4. SIDEWALKS SHALL BE PROVIDED IN ACCORDANCE WITH THE APPLICABLE ROAD AND SIDEWALK RAMP STANDARDS. THE SIDEWALK SHALL EXTEND ALONG THE INTERSECTION TRUNCATION, ONE FOOT FROM THE PROPERTY LINE.
5. WHERE EITHER ROAD IS OPEN SECTION, REFER TO THOSE APPLICABLE STANDARDS. THE FINAL CONFIGURATION FOR OPEN SECTION ROADS SHALL BE SUBJECT TO MCDOT APPROVAL ON A CASE BY CASE BASIS.

P:\DOT\STD\MC224.01 6-24-94 9:11:14 am EST

APPROVED JAN 5/95
DATE

REVISED

MONTGOMERY COUNTY
DEPARTMENT OF TRANSPORTATION

[Signature]
DIRECTOR, DEPT. OF TRANS.

MONUMENTAL ENTRANCE

[Signature]
CHIEF, DIV. OF ENG. SERVICES

STANDARD NO. MC-224.01