



L	DIFF. IN ELEV. BTWN. PT. "O" AND PT. "X"
10'	0.85'
12'	1.09'
15'	1.45'
20'	2.05'
25'	2.65'
30'	3.25'
35'	3.85'
40'	4.45'
45'	5.05'

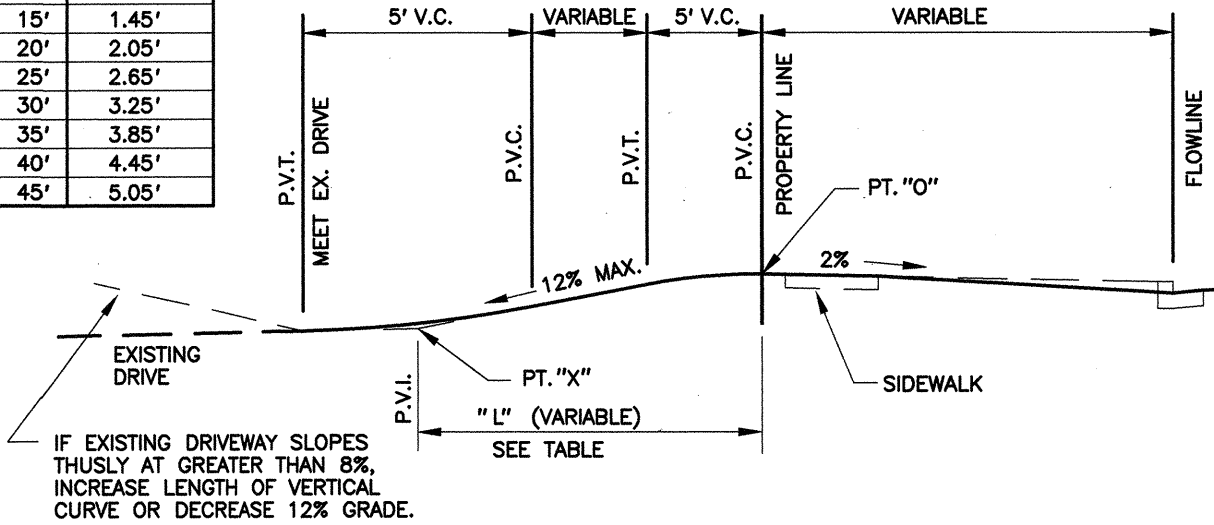

L	DIFF. IN ELEV. BTWN. PT. "O" AND PT. "X"
10'	0.95'
12'	1.19'
15'	1.55'
20'	2.15'
25'	2.75'
30'	3.35'
35'	3.95'
40'	4.55'
45'	5.15'

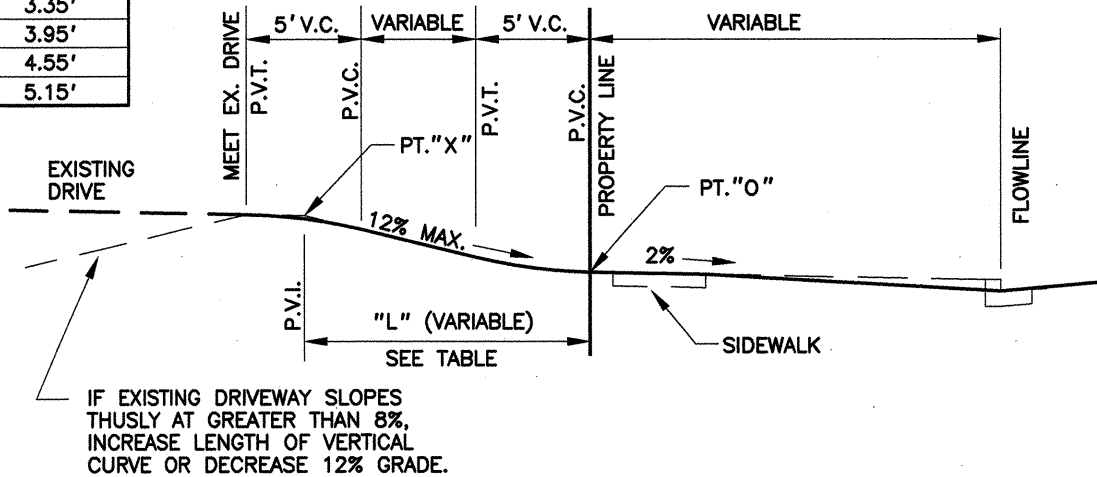

P:\DOT\STD\MC30301 9-29-95 6:46:22 am EST

APPROVED JAN 5/96
 DATE

 DIRECTOR, DEPT. OF TRANS.

 CHIEF, DIV. OF ENG. SERVICES

REVISED

MONTGOMERY COUNTY
 DEPARTMENT OF TRANSPORTATION
**METHODS OF
 TRANSITIONING DRIVEWAYS**
STANDARD NO. MC-303.01