
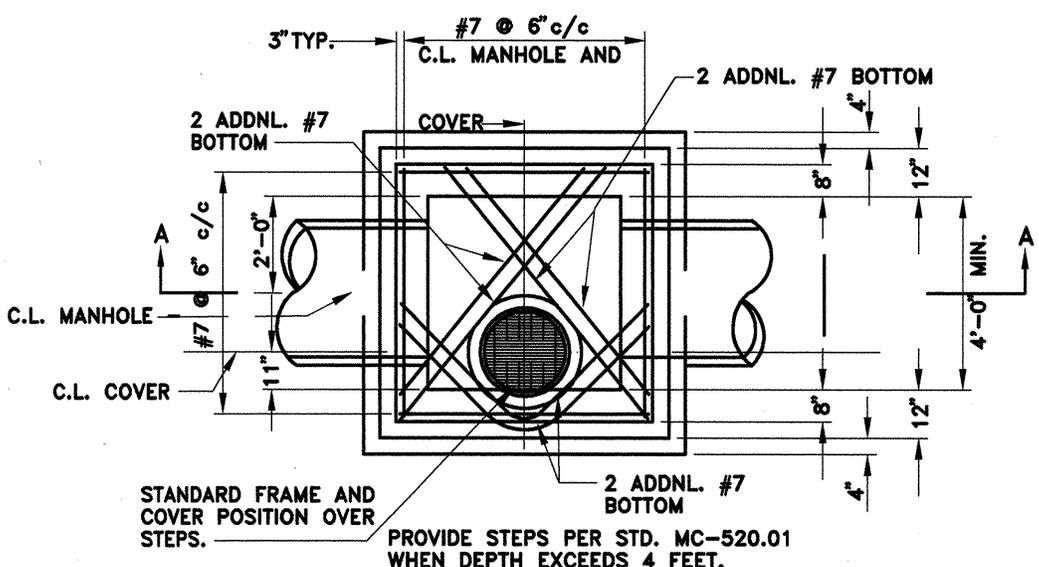


USE BRICK FOR
FRAME & COVER
EXTENSION.

NOTE: MANHOLE FRAME AND COVER
TO BE LOCATED OVER STEPS
SEE PLANS FOR TOP ELEVATION.

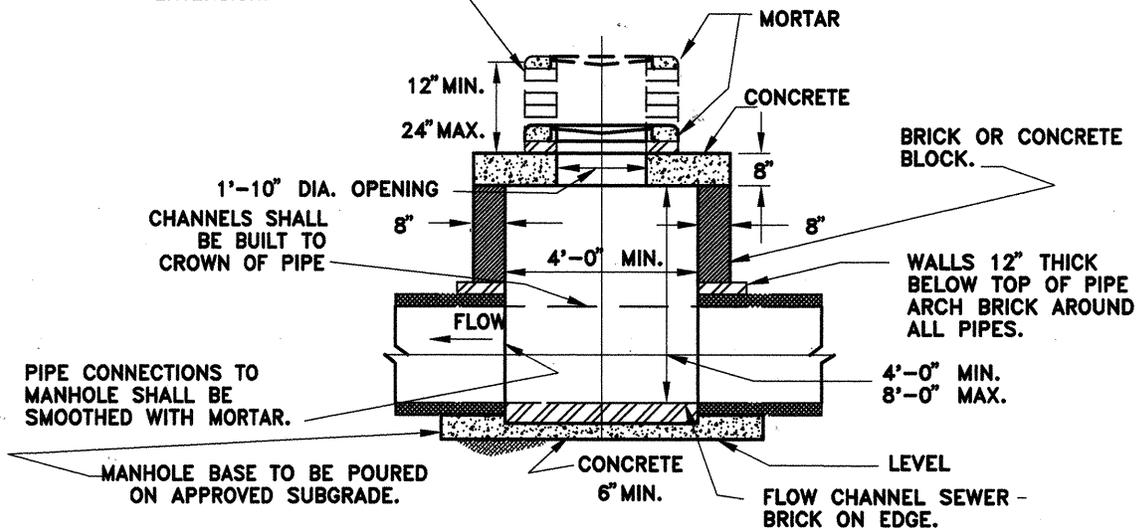

DEPTH	WALL THICKNESS
0' - 6'	8"
6' - 8'	12"

GENERAL NOTES

1. REFER TO MARYLAND STATE HIGHWAY ADMINISTRATION FOR MATERIALS AND METHODS OF CONSTRUCTION.
2. USE SOLID MASONRY (BRICK OR CONCRETE BLOCK) OR POURED CONCRETE FOR WALLS.
3. PARGE OUTSIDE WALLS.
4. MORTAR SHALL CONFORM TO ASTM SPECIFICATION C270 TYPE M.
5. $f'_c = 3,500$ P.S.I. at 28 DAYS.
6. FOR PIPES LARGER THAN 30" PROVIDE STEPS IN CHANNELS OF STRUCTURES. SEE STANDARD DETAIL . STANDARD MC-520.02

P:\DDTSTD\MCS1001 7-12-94 8:41:05 am EST

APPROVED JAN 5/96
DATE

REVISED

MONTGOMERY COUNTY
DEPARTMENT OF TRANSPORTATION

James M. ...
DIRECTOR, DEPT. OF TRANS.

"B" MANHOLE

Ed ...
CHIEF, DIV. OF ENG. SERVICES

STANDARD NO. MC-515.01