


PLAN

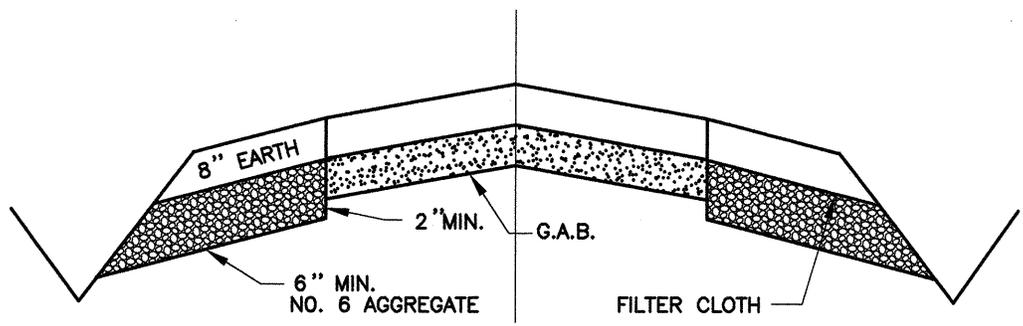

SECTION A - A

GENERAL NOTES

1. MINIMUM SLOPE OF UNDERDRAIN = 1/4 INCH PER FOOT.
2. AGGREGATE IN TRENCH SHALL BE MSHA NO. 6 AGGREGATE, SPECIFICATIONS ARTICLE 20.02.
3. FOR CONSTRUCTION METHODS AND SPACING INTERVALS SEE MCDOT SPECIFICATIONS - 1981 SUBGRADE DRAINS FOR OPEN SECTION ROADWAYS.

P:\DOT\STD\MCS2501 9-29-95 71636 am EST

APPROVED <u>JAN 5/96</u> <small>DATE</small>	REVISED <hr/> <hr/> <hr/> <hr/> <hr/> <hr/> <hr/> <hr/>	MONTGOMERY COUNTY DEPARTMENT OF TRANSPORTATION
 DIRECTOR, DEPT. OF TRANS.		<b>SUBGRADE DRAINS</b> <b>OPEN SECTION ROADWAYS</b>
 CHIEF, DIV OF ENG. SERVICES		<b>STANDARD NO. MC-525.01</b>