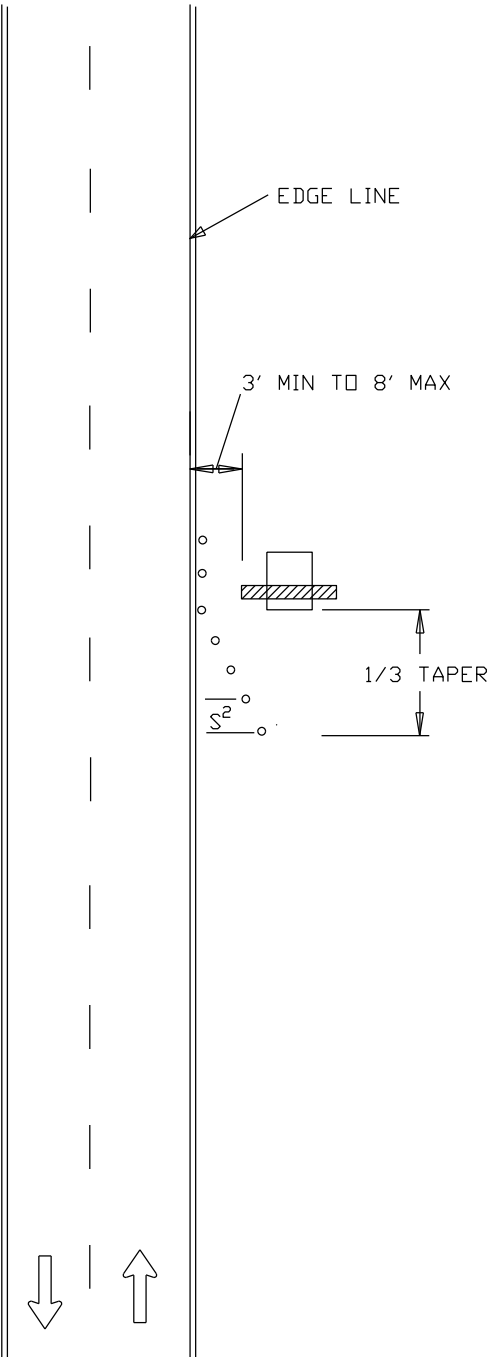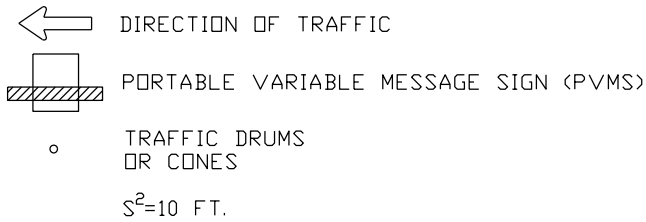REFER TO TCP 100.01 FOR TAPER LENGTHS

EDGE LINE

3' MIN TO 8' MAX

1/3 TAPER

$\overline{S^2}$

NOTES:
PVMS MESSAGES AND PLACEMENT OF THIS
DEVICE SHALL BE APPROVED BY THE
TRAFFIC OPERATIONS SECTION

THE EDGE OF THE SIGN BOARD OF THE
PVMS SHALL BE PLACED A MINIMUM OF
3' AND NO MORE THAN 8' FROM EDGE LINE

⟵ DIRECTION OF TRAFFIC

▭ PORTABLE VARIABLE MESSAGE SIGN (PVMS)

∘ TRAFFIC DRUMS
OR CONES

S^2=10 FT.

	REVISION BY	DATE	APPROVED	DATE 07-01-16	TRAFFIC OPERATIONS SECTION MONTGOMERY COUNTY, MARYLAND
				DES. BY MCDPWT	PORTABLE VARIABLE MESSAGE SIGN PLACEMENT
				DRAWN BY TCLE	APPROVED
				SCALE	_____ CHIEF, TRAFFIC OPERATIONS SECTION
				NTS	STANDARD TCP-100.02 ___ OF ___ SHEETS