
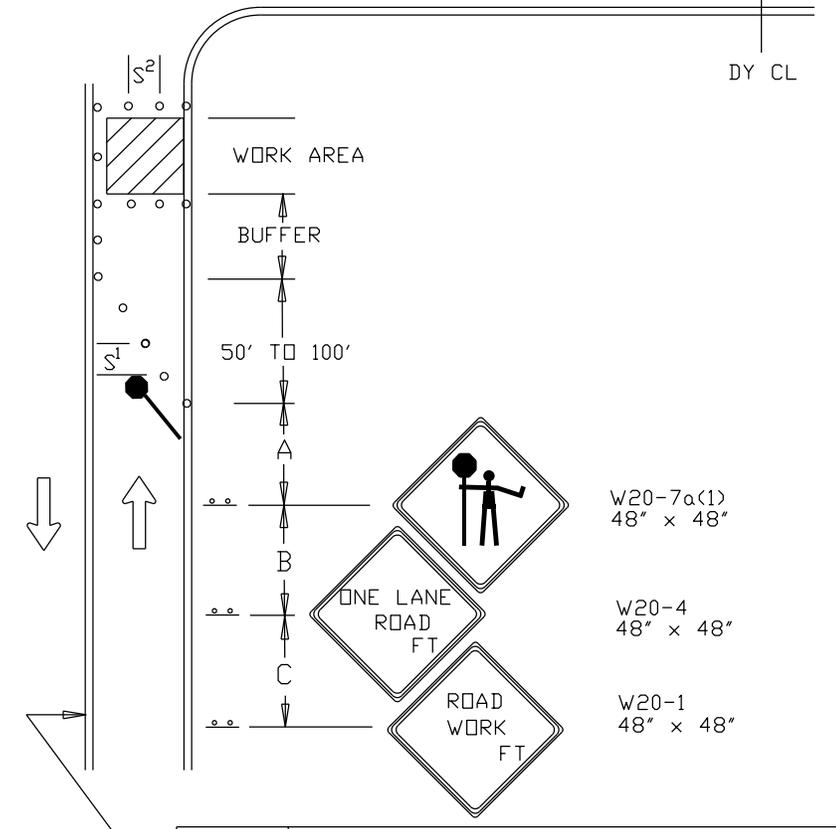


NOTE: ACCESS POINTS WITHIN LANE CLOSURE SHALL BE CONTROLLED BY FLAGGER(S)
 REFER TO TCP 100.01 FOR SIGN SPACING, TAPER LENGTHS AND BUFFER ZONE LENGTHS

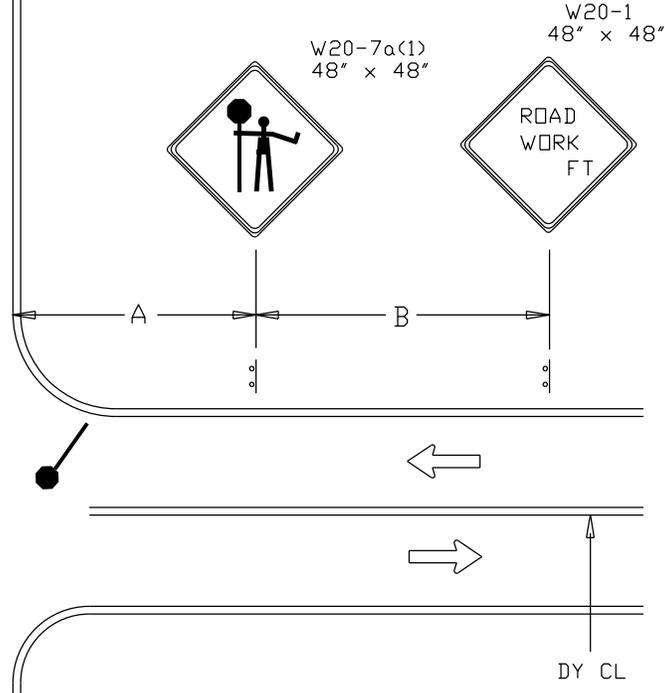

- DIRECTION OF TRAFFIC
- SIGN
- WORK SITE
- FLAGGER
- TRAFFIC DRUMS OR CONES
- $S^1 = 30$ FT.
- $S^2 = 10$ FT.

			DATE	TRAFFIC OPERATIONS SECTION MONTGOMERY COUNTY, MARYLAND	
			DES. BY	MCDPWT	
			DRAWN BY	TACLE	
			SCALE	NTS	
REVISION BY	DATE	APPROVED	APPROVED		
			CHIEF, TRAFFIC OPERATIONS SECTION		
			STANDARD TCP-105.04 _____ OF _____ SHEETS		