


REFER TO TCP 100.01 FOR TAPER LENGTHS

NOTES:
 PVMS MESSAGES AND PLACEMENT OF THIS
 DEVICE SHALL BE APPROVED BY THE
 TRAFFIC OPERATIONS SECTION

THE EDGE OF THE SIGN BOARD OF THE
 PVMS SHALL BE PLACED A MINIMUM OF
 3' AND NO MORE THAN 8' FROM EDGE LINE

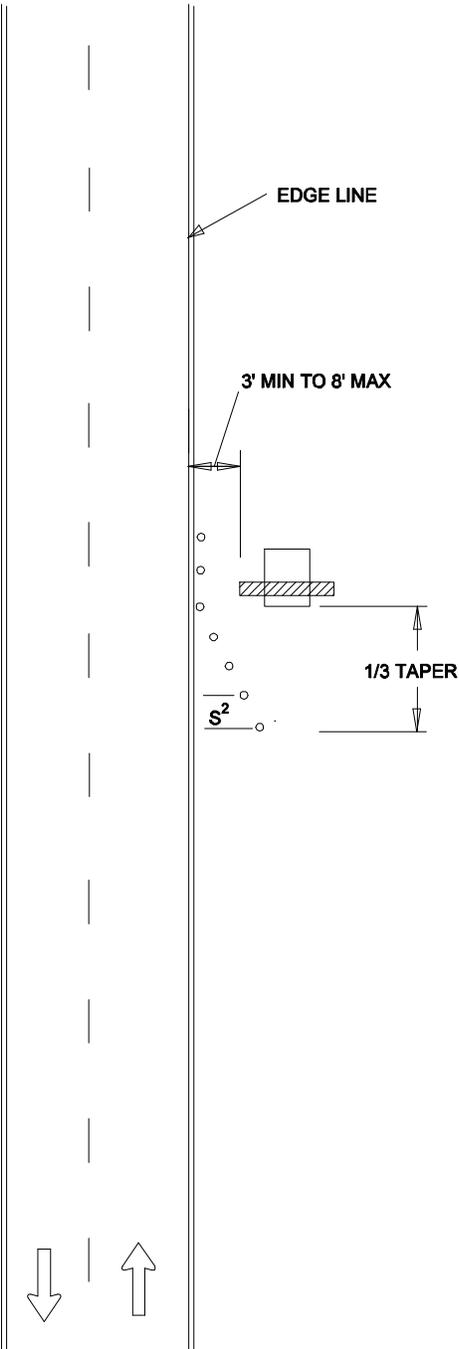

-  DIRECTION OF TRAFFIC
-  PORTABLE VARIABLE MESSAGE SIGN (PVMS)
-  TRAFFIC DRUMS
OR CONES
- $S^2 = 10$ FT.

			DATE	TRAFFIC OPERATIONS SECTION	
			07-01-12	MONTGOMERY COUNTY, MARYLAND	
			DES. BY	PORTABLE VARIABLE MESSAGE	
			MCDPWT	SIGN PLACEMENT	
REVISION	DATE	APPROVED	DRAWN BY	APPROVED	
			TCLE	_____	
			SCALE	CHIEF, TRAFFIC OPERATIONS SECTION	
			NTS	STANDARD TCP-100.02 _____ OF _____ SHEETS	