

NOTE:

1. SEE STRUCTURE TABLES, FOR ALL DIMENSIONS AND ELEVATIONS OF STRUCTURES, SHEET DE-03.
2. TREES WITHIN THE LIMITS OF GRADING SHALL NOT BE REMOVED UNLESS OTHERWISE DIRECTED BY MONTGOMERY COUNTY. TREE REMOVAL IN PARKLAND SHALL REQUIRE M-NCPPC APPROVAL.
3. SEE EP-01 TO EP-04 FOR EROSION AND SEDIMENT CONTROL AND CONSTRUCTION ACCESS.
4. WITHIN GRADED AREAS, FURNISHED STREAMBED MATERIAL SHALL BE INSTALLED ON THE CHANNEL BOTTOM AND POINT BARS AS DEFINED IN THE TYPICAL AND GRADING CROSS SECTIONS. STREAMBED MATERIAL SHALL TRANSITION TO MEET EXISTING STREAMBED MATERIAL AT UPSTREAM AND DOWNSTREAM LIMITS OF GRADED AREAS. FURNISHED STREAMBED MATERIAL SHALL HAVE A D50 OF 8.92mm AND A D86 OF 71.77mm.
5. SEE CONSTRUCTION DETAILS FOR SOIL STABILIZATION MATTING INSTALLATION.
6. CONTRACTOR SHALL CUT ALL VINES ON TREES WITHIN THE STREAMWORK LOD BY CUTTING AT THE BASE AND REMOVING THE ROOTS.
7. SEE EP-06 FOR SEQUENCE OF CONSTRUCTION.
8. CONTRACTOR SHALL FOLLOW PROCEDURES FOR REMOVAL OF INVASIVE SPECIES OUTLINED IN MONTGOMERY COUNTY PARK AND PLANNING "BEST MANAGEMENT PRACTICES FOR CONTROL OF NON-NATIVE INVASIVES"

THE MARYLAND-NATIONAL  
CAPITAL PARK AND PLANNING  
COMMISSION, DEPARTMENT OF  
PARK AND PLANNING

M-NCPPC RECORD FILE NO. 2006-12

REVIEWED BY \_\_\_\_\_

APPROVED BY \_\_\_\_\_

CHIEF, CONSTRUCTION SECTION


DATE APPROVED \_\_\_\_\_

**THIS IS NOT A PERMIT  
TO BEGIN CONSTRUCTION**

This approval is for technical review only.  
For permit information, contact Herb De Hoff,  
Construction Supervisor at (301) 495-2558.

NOTE: ACCESS ROUTES AND TREE PROTECTION  
MEASURES TO BE FIELD DETERMINED AT  
PRE-CONSTRUCTION MEETING

CONTROL:  
MARYLAND STATE PLANE COORDINATE SYSTEM  
(NAD 83/91) AND NAVD 88 VERTICAL DATUM

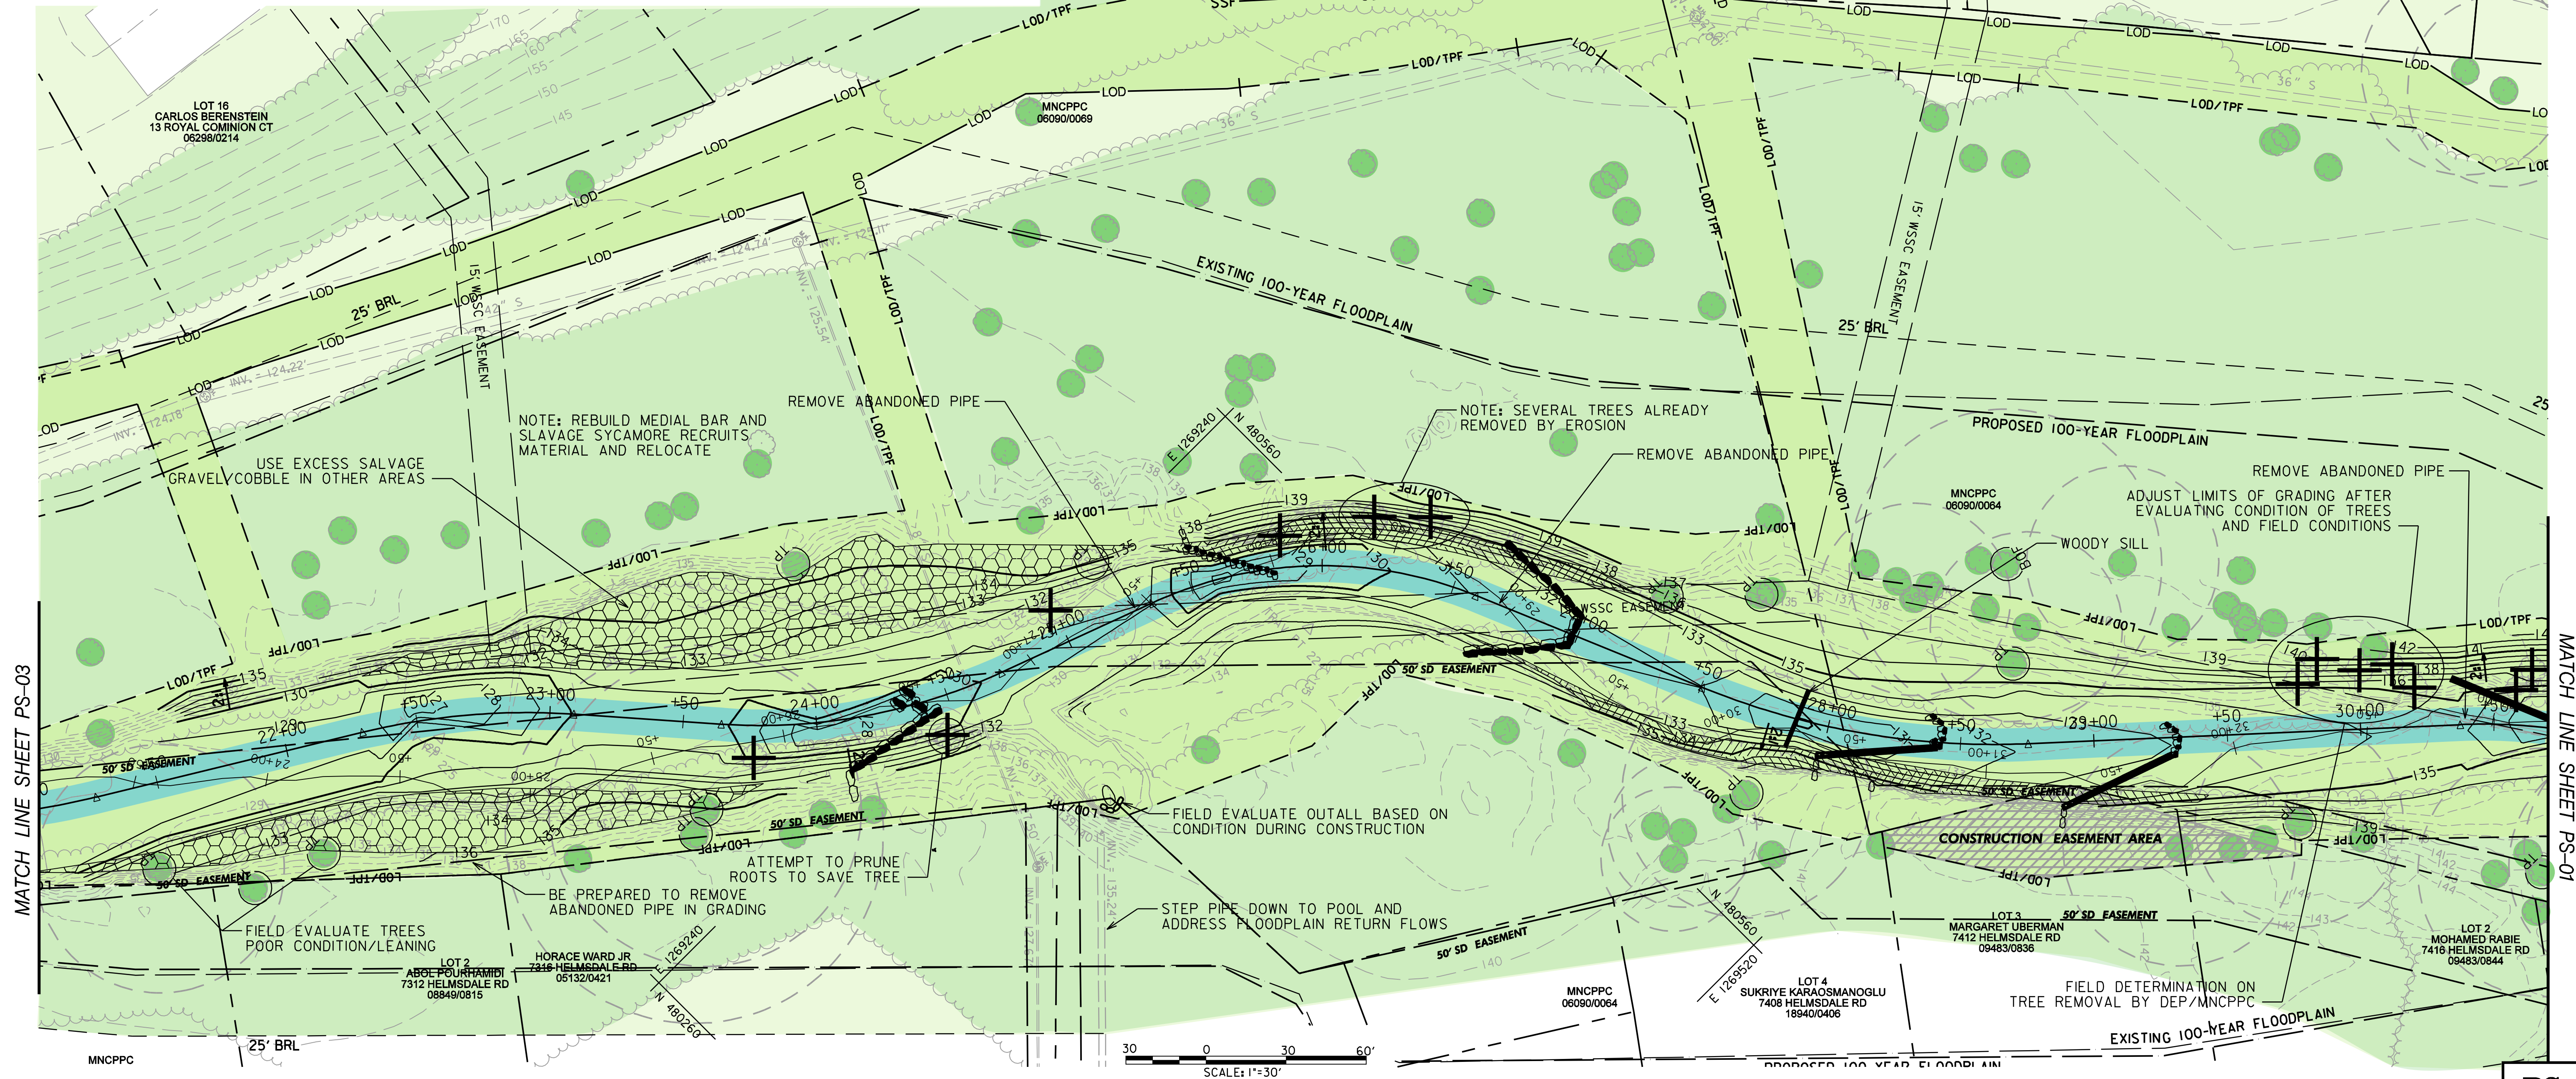

PS-02

DESIGN- JSCGRS  
DRAFT- DDJS  
APPROVED- LK  
DATE: NOVEMBER 2010  
SHEET 6 OF 47  
FILE NO:



**GPI** GREENMAN-PEDERSEN, INC.  
ENGINEERS, ARCHITECTS, PLANNERS, CONSTRUCTION ENGINEERS & INSPECTORS  
10977 GULFORD ROAD, ANNAPOLIS, MARYLAND 20710  
PHONE: (410) 293-7772 FAX: (410) 293-7773  
WWW.GPI-INC.COM

Coastal Resources, Inc.  
ENVIRONMENTAL CONSULTANTS  
2008 Solomons Island Rd.  
Edgewater, MD 21037

**CLIENT:**  
MR. DANIEL HARPER,  
MARK WILCOX  
MONTGOMERY COUNTY DEPARTMENT  
OF ENVIRONMENTAL PROTECTION  
255 ROCKVILLE PIKE  
ROCKVILLE, MARYLAND 20850

**MISS UTILITY**  
CALL "MISS UTILITY" AT 1-800-257-7777, 48 HOURS  
PRIOR TO THE START OF WORK. THE EXCAVATOR  
MUST NOTIFY ALL PUBLIC UTILITY COMPANIES WITH  
UNDERGROUND FACILITIES IN THE AREA OF PROPOSED  
EXCAVATION AND HAVE THOSE FACILITIES LOCATED BY  
THE UTILITY COMPANIES PRIOR TO COMMENCING  
EXCAVATION. THE EXCAVATOR IS RESPONSIBLE FOR  
COMPLIANCE WITH REQUIREMENTS OF CHAPTER 36A  
OF THE MONTGOMERY COUNTY CODE.

WORK IS PROPOSED ON: LIBER 9483 FOLIO 836

**LOWER BOOZE CREEK  
STREAM RESTORATION**

NOTE: TREES 82 & 83 SHOULD BE  
EVALUATED BY DEP/MSA

**GRADING PLAN SHEET 2 OF 4**

7TH ELECTION DISTRICT MONTGOMERY COUNTY, MARYLAND

**MONTGOMERY COUNTY DEPARTMENT OF  
PERMITTING SERVICES APPROVED FOR:**

STORMWATER MANAGEMENT:

REVIEWED DATE \_\_\_\_\_

APPROVED DATE \_\_\_\_\_

S.W. FILE NO. \_\_\_\_\_

SEDIMENT CONTROL TECHNICAL REQUIREMENTS:

REVIEWED DATE \_\_\_\_\_

APPROVED DATE \_\_\_\_\_

NOTE: MDCPS APPROVAL DOES NOT NEGATE THE  
NEED OF A MDCPS ACCESS PERMIT.

ADMINISTRATIVE REQUIREMENTS:

REVIEWED DATE \_\_\_\_\_

SEDIMENT CONTROL PERMIT NO. \_\_\_\_\_

IF THE PROJECT HAS NOT STARTED BY THE DATE OF APPROVAL,  
THE PERMIT WILL EXPIRE ONE YEAR FROM THE DATE OF APPROVAL.