


2019 MONTGOMERY COUNTY RACK INSTALLATION

INSTALLATION INFORMATION

- Pedestrian and ADA thoroughfare should be considered in rack placement.
- Bicycle racks cannot block entrances or exits to buildings.
- Spacing requirements are about 7'L x 4'W per rack and a stable concrete or asphalt surface is needed.
- A specialized security bolt should be utilized to prevent tampering and provide stability.

INSTALLATION INFORMATION

Below is a graphic depicting the Association of Pedestrian and Bicycle Professionals (ABPB) recommended dimensions for bicycle rack areas.

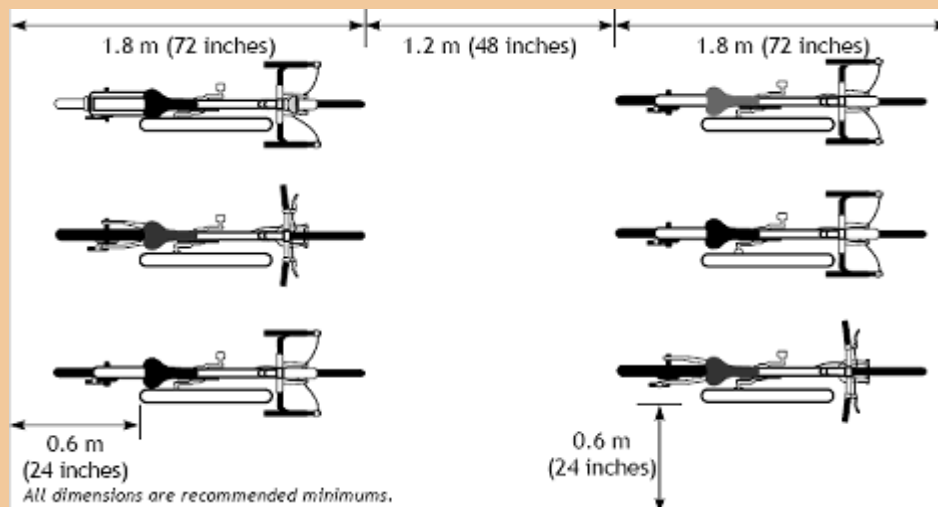

FOR MORE INFORMATION

CONTACT

Kyle Lukacs, MCDOT

kyle.lukacs@montgomerycountymd.gov

TO REQUEST A RACK

http://www.montgomerycountymd.gov/dot-dte/Resources/Files/bikerackrequestformFY_20.pdf

VISIT

www.bikemontgomery.com

<http://www.fhwa.dot.gov/publications/research/safety/pedbike/05085/chapt17.cfm>

https://www.apbp.org/resource/resmgr/Bicycle_Parking/EssentialsofBikeParking_FI_NA.pdf