

The Chief XD takes the industry standard for handline nozzles to a whole new level. It offers accurate high volume flows at low tip pressures and is built tough like no other nozzle for Xtreme Duty, or XD. The Chief XD is the only handline nozzle that offers a forged shutoff body and forged metal bale handle for maximum strength. It also includes as standard a full round metal ball for the best stream performance, as well as fixed molded urethane or spinning stainless steel metal teeth that don't break. All indicators and markings are laser etched, with no labels to peel off or scratch. Ergonomic grip inserts help with handling and can also be color coded. It's durability and efficiency ensures an embedded level of safety for you and your crew, fire after fire.

- Accurate & wide range of flows
- Available with 50, 75, or 100 psi operating pressure
- Fixed gallonage from straight stream to full fog
- Forged aluminum shutoff body and bale handle
- Laser etched markings
- Dual drive shutoff with full round metal ball
- Spinning stainless steel or fixed molded urethane teeth
- Color coded bumper along with bale handle & pistol grip inserts



# **Chief XD Tips**

# Mid-Range 1.5" / Rigid Base

| 150 ര 50 | 125 a 75 | 95 @100   |
|----------|----------|-----------|
| 160 ര 50 | 150 ര 75 | 125 @ 100 |
| 175 ര 50 | 175 ര 75 | 150 ര 100 |
|          | 185 ര 75 | 175 @ 100 |
|          | 200 ര 75 |           |

# High-Range 1.5" / Rigid Base

| 185 ര 50 | ) | 250 ര 75 | 250 ര100 |
|----------|---|----------|----------|
| 210 @ 50 | 1 | 300 G 75 |          |

250 @ 50 265 @ 50

200 10 00



Mid-Range Tip

# High-Range Tip

## Chief XD Nozzles

| Mid-Range | 1.5" / Free S | wivel Base |
|-----------|---------------|------------|
| 150 ര 50  | 125 ര 75      | 95 @100    |
| 160 ര 50  | 150 ര 75      | 125 ര 100  |
| 175 ര 50  | 175 ര 75      | 150 ര 100  |
|           | 185 ര 75      | 175 ര 100  |
|           | 200 ര 75      |            |

# High-Range 1.5" / Free Swivel Base

| 185 @ 50            | 250 ര 75 | 250 ര100 |
|---------------------|----------|----------|
| 210 @ 50            | 300 ര 75 |          |
| 250 @ 50            |          |          |
| 265 <del>0</del> 50 |          |          |

# High-Range 2.5" / Free Swivel Base

| 185 ര 50 | 250 ര 75 | 250 @100 |
|----------|----------|----------|
| 210 @ 50 | 300 ര 75 |          |
| 250 @ 50 |          |          |

265 @ 50

# **Chief XD Nozzles with Pistol Grip**

# Mid-Range 1.5" / Free Swivel Base 150 @ 50 125 @ 75 95 @100 160 @ 50 150 @ 75 125 @ 100 175 @ 50 175 @ 75 150 @ 100 185 @ 75 175 @ 100 200 @ 75

# High-Range 1.5" / Free Swivel Base

| ngn Kange | 1.0 / 1100 | SWIVE DUS |
|-----------|------------|-----------|
| 185 ര 50  | 250 ര 75   | 250 ര100  |
| 210 @ 50  | 300 ര 75   |           |
|           |            |           |

250 @ 50 265 @ 50

# **High-Range** 2.5" / Free Swivel Base

| 3        | <b>J</b> |          |
|----------|----------|----------|
| 185 @ 50 | 250 @ 75 | 250 ര100 |
| 210 @ 50 | 300 @ 75 |          |

250 @ 50

265 @ 50

# Specify when ordering:

- Flow rate & pressure
- Bumper, bale handle, and pistol grip insert color (orange standard)
- Spinning stainless steel metal teeth (standard) or fixed molded urethane teeth

Inlet threads









# **Nozzle Options**

# Colors

Choose bumper color, bale insert, and pistol grip insert color (orange is standard on Chief XD)



# **Teeth**

Choose from spinning stainless steel metal or fixed molded urethane teeth.



Spinning Stainless Steel (Standard)



Fixed Molded Urethane

# **Inlet Threads**

- NHT (Standard)
- NPSH
- BSPP
- Others available. Please provide thread spec:
   ODM (Outside Diameter Male), TPI (Threads Per Inch), and Province/City. (Ex. 3.030 x 8 NYFD Thread)





Elkhart Brass XD Shutoffs and Playpipes are designed and constructed for rugged use and reliable performance. They are built strong with forged shutoff bodies and forged metal bale handles earning the title Xtreme Duty, or XD. They provide an excellent foundation for break-apart applications using smooth bore or fog nozzle tips. Elkhart Brass XD Shutoffs are available with a variety of options, including built-in smooth bore discharges that can be used with fog nozzle tips for maximum versatility.

- Dual drive shutoff with full round metal ball
- Forged aluminum shutoff body
- Forged metal bale handle
- Attention to detail in waterway alignment and smoothness of operation throughout
- Laser etched markings
- Color coded pistol grip and bale handle inserts



### **XD Shutoffs**

**1.5" Shutoff** Free Swivel Base

1.5" Shutoff Free Swivel Base / Pistol Grip

2.5" Shutoff Free Swivel Base

2.5" Shutoff Free Swivel Base / Pistol Grip



1.5" XD Shutoff



1.5" XD Shutoff w/ Pistol Grip

# **XD Shutoffs with Integral Smooth Bore**

Available discharge sizes: 7/8", 15/16", 1", 1-1/6", 1-1/8" 1-3/16", 1-1/4"



1.5" Inlet 1.5" Outlet

1.5" Shutoff Free Swivel Base / Pistol Grip

1.5" Inlet 1.5" Outlet

2.5" Shutoff Free Swivel Base

2.5" Inlet 1.5" Outlet

2.5" Shutoff Free Swivel Base / Pistol Grip



2.5" XD Shutoff



2.5" XD Shutoff w/ Pistol Grip



1.5" XD Shutoff w/ Smooth Bore



1.5" XD Shutoff w/ Smooth Bore & Pistol Grip

# **XD Playpipes**

2.5" Shutoff Free Swivel Base

2.5" Inlet 1.5" Outlet

2.5" Shutoff Free Swivel Base / Ladder Hook



2.5" XD Shutoff w/ Smooth Bore



2.5" XD Shutoff w/ Smooth Bore & Pistol Grip



# Specify when ordering:

- Bale and Pistol Grip insert colors (black standard)
- Inlet/Outlet threads
- Integral Smooth Bore discharge size (if applicable)




2.5" XD Playpipe



2.5" XD Playpipe w/

Elkhart Brass took classic smooth bore tips to the next level. The 185-XD, 187-XD, 188-XD, ST-185-XD, and ST-190-XD smooth bore tips feature durable urethane bumpers and laser etching. Extra knurling has also been added for increased control and grip.

- · Lightweight aluminum construction
- Laser etched flow rates
- Durable urethane molded bumper

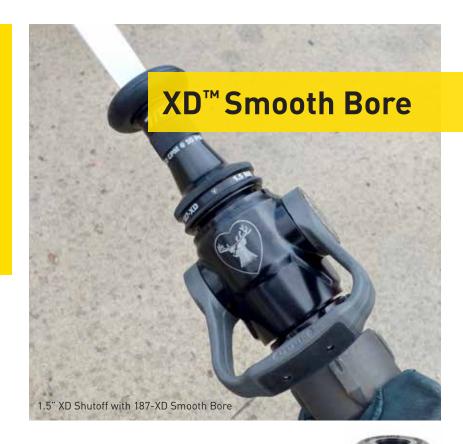

# **Smooth Bore Single Tip**

**185-XD** 1.5" Inlet / 1.5" Outlet / 4.5" Length Available Discharges: 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-3/16", 1-1/4"

**187-XD** 1.5" Inlet / 4.5" Length Available Discharges: 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-3/16", 1-1/4"

**188-XD** 1.5" Inlet / 7.0" Length Available Discharges: 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-3/16", 1-1/4"

# **Smooth Bore Stacked Tips**

**ST-185-XD** 1.5" Inlet / 6.625" Length / FDNY Stack Available Discharges: 1/2" & 7/8", 15/16", 1-1/8", 1-3/16"

**ST-185-XD-IFD** 1.5" Inlet / 7.625" Length / Indy Stack Available Discharges: 1-1/8" & 1-1/4"

ST-185-XD-CAFS 1.5" Inlet / 6.625" Length / CAFS Stack Available Discharges: 15/16" & 1-1/8"

**ST-190-XD** 1.5" Inlet / 9.0" Length / Triple Stack Available Discharges: 1" & 1-1/8" & 1-1/4"

# Specify when ordering:

- Inlet threads (FNH or **FNPSH**)
- Smooth Bore discharge size (if applicable)





ST-185-XD ST-185-XD-IFD ST-185-XD-CAFS