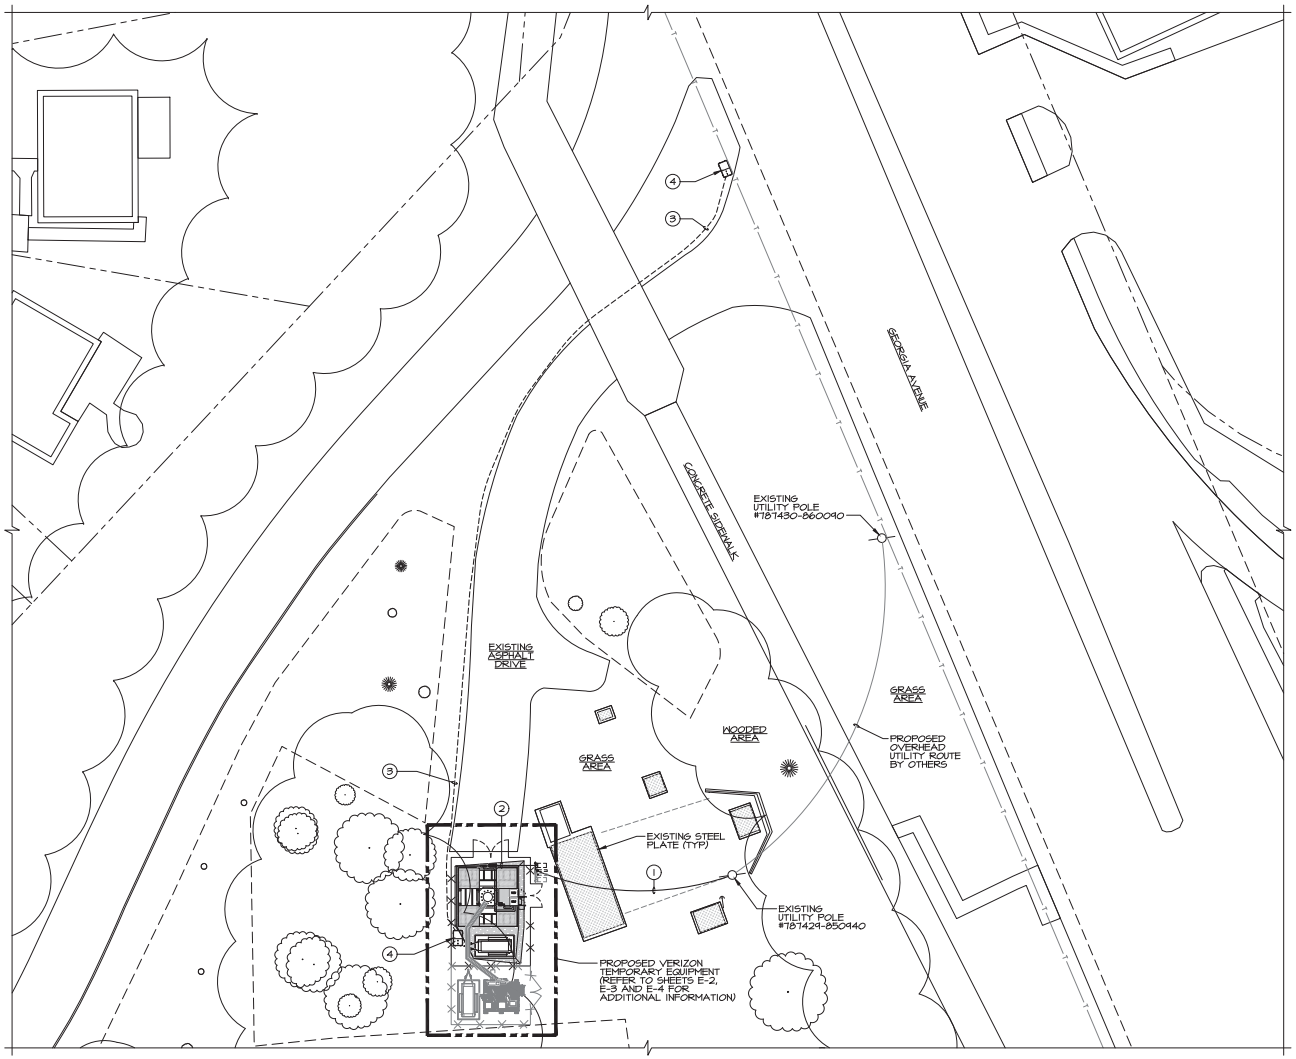

⑤⑥ UTILITY ROUTING SITE PLAN

SCALE: 1" = 20'-0"

IN

DRAWING NOTES

1. PROPOSED OVERHEAD TEMPORARY ELECTRIC SERVICE (120/240V, 1Ø, 3W) BY UTILITY COMPANY FROM PROPOSED UTILITY POLE #187429-850940 TO PROPOSED WEATHERHEAD MOUNTED HIGH TO BACKBOARD SUPPORT POST. WEATHERHEAD PROVIDED AND INSTALLED BY CONTRACTOR PER UTILITY COMPANY STANDARDS. REFER TO DETAILS, SHEET E-6 FOR ADDITIONAL INFORMATION.
2. EXTEND ONE (1) - 3" PVC CONDUIT ABOVE GRADE FROM PROPOSED SERVICE DISCONNECT SWITCH TO PROPOSED PANEL "PP1" MOUNTED ON VERIZON EQUIPMENT BACKBOARD FOR EXTENSION OF POWER. COORDINATE EXACT ROUTING AND CONDUIT SUPPORT METHOD WITH VERIZON REPRESENTATIVE IN THE FIELD.
3. EXTEND ONE (1) - 4" SCHEDULE 40 PVC CONDUIT FROM PROPOSED FIBER HANDHOLE AT COMPOUND TO PROPOSED FIBER HANDHOLE AT GEORGIA AVENUE (APPROXIMATELY 325 L.F.). COORDINATE EXACT ROUTING AND TERMINATION POINT WITH VERIZON REPRESENTATIVE IN THE FIELD PRIOR TO START OF WORK. PROVIDE NYLON PULL ROPE AND ENDCAPS. VERIZON LANDLINE SHALL PROVIDE AND INSTALL INNERDUCTS AS REQUIRED. COORDINATE UTILITY SOURCE TO BE USED FOR EXTENSION OF PROPOSED INCOMING TELCO SERVICE WITH UTILITY COMPANY PRIOR TO START OF WORK.
4. PROPOSED FIBER HANDHOLE FOR EXTENSION OF FIBER. COORDINATE EXACT LOCATION, SIZE, COVER RATING, AND REQUIREMENTS WITH VERIZON REPRESENTATIVE AND UTILITY COMPANY PRIOR TO START OF WORK.
5. CONTRACTOR SHALL COORDINATE INSTALLATION METHOD FOR CONDUITS BEING EXTENDED BELOW GRADE (ASPHALT/ GRAVEL DRIVE, GRASS AREAS, ETC.) WITH LANDLORD PRIOR TO START OF WORK. COORDINATE FINAL ROUTING WITH ALL EXISTING UNDERGROUND UTILITIES.
6. CONTRACTOR SHALL COORDINATE EXACT LOCATION OF ALL EXISTING UNDERGROUND UTILITIES PRIOR TO START OF WORK.

0 10 20 40 60

SCALE: 1"=20'-0"

TEI
TELEGENT ENGINEERING INC
2216 Commerce Road, Suite 1
Forest Hill, MD 21050
410-692-5816
www.tel-eng.com

01/10/2025

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, TIMOTHY SHIDT, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND. LICENSE NO. 21585, EXPIRATION DATE: MAY 8, 2025.

verizon

WOODSIDE TEMP RELO

CORNER OF I-495 & SR97, SILVER SPRING, MONTGOMERY COUNTY, MARYLAND 20910

REVISIONS:

NO.	DESCRIPTION	DATE
	COUNTY COMMENTS	01/10/25
	OZAH COMMENTS	11/12/24

LAST REV.:

PROJECT NO: 24087B

DATE: NOV. 12, 2024

SCALE: AS NOTED

TITLE: UTILITY ROUTING SITE PLAN AND NOTES

SHEET: E-8

TEI#24087B

Exhibit 19
OZAH Case No: CU 25-05