

LONGITUDINAL UNDERDRAIN			
QUANTITY	FROM	TO	
94 LF	415+00 RT	415+94 RT	
97 LF	415+00 LT	415+98 LT	
28 LF	416+06 LT	416+31 LT	
142 LF	416+12 RT	417+54 RT	
68 LF	416+96 LT	417+63 LT	

MILL AND OVERLAY			
QUANTITY	FROM	TO	
350 SF	501+00	501+25	

RESET WOODEN RAILING			
QUANTITY	FROM	TO	
30 LF	415+00 LT	415+30 LT	

FULL DEPTH PAVEMENT			
QUANTITY	FROM	TO	
17,000 SF	415+00	421+00	
2,005 SF	500+20	501+00	

WEDGE AND LEVEL			
QUANTITY	FROM	TO	
2,195 SF	419+35 RT	420+90 RT	

EXISTING PAVEMENT REMOVAL			
QUANTITY	FROM	TO	
23 CY	415+00 LT	416+24 LT	
46 CY	418+83 LT	419+85 LT	
7 CY	418+05 RT	418+31 RT	

RESIDENTIAL SIDEWALK, CLOSED SECTION MC-110.01			
QUANTITY	FROM	TO	
1,886 SF	415+00 RT	419+38 RT	
822 SF	415+00 LT	416+33 LT	
1,834 SF	416+86 LT	421+00 LT	

DETECTABLE WARNING SURFACE MD-655.40			
QUANTITY	STATION	WIDTH	
14 SF	418+30 LT	20.0'	
20 SF	418+75 LT	20.0'	

RESIDENTIAL DRIVEWAY MC - 301.01			
QUANTITY	STATION	WIDTH	
34 SY	418+44 LT	10.0'	
81 SY	418+57 RT	10.0'	
54 SY	417+35 LT	24.8'	
81 SY	417+73 RT	18.3'	
45 SY	418+12 LT	12.5'	
57 SY	419+50 RT	20.5'	

COMMERCIAL DRIVEWAY MC - 302.01			
QUANTITY	STATION	WIDTH	
52 SY	418+89 RT	20.8'	

COMBINATION CONCRETE CURB AND GUTTER TYPE D MD-620.02			
QUANTITY	FROM	TO	
434 LF	415+00 RT	419+45 RT	
117 LF	415+00 LT	500+47 LT	
442 LF	500+38 RT	421+00 LT	

MOUNTABLE CONCRETE CURB & GUTTER MC-101.01			
QUANTITY	FROM	TO	
53 LF	500+47 LT	501+00 LT	
63 LF	500+38 RT	501+00 RT	

- NOTES:
- WSSC TO INSTALL 8" WATER MAIN IN THE VICINITY BETWEEN RILEY PLACE AND SELWAY LANE. CONTRACTOR TO COORDINATE WITH WSSC FOR EXACT LOCATION OF WATER MAIN. WATER MAIN DEPTH TO BE DETERMINED BY WSSC. PLANNED IN NOVEMBER 2018. SEE SHEET DT-02 FOR APPROXIMATE WSSC WATER MAIN RELOCATION.
 - CONTRACTOR SHALL TAKE EXTRA PRECAUTION WHERE THE CONSTRUCTION ACTIVITIES WILL BE PERFORMED WITHIN 5 FEET OF THE EXISTING WASHINGTON GAS FACILITIES AND PIPELINES. PLEASE SEE GENERAL NOTES SHEET FOR MORE DETAILS.

DESIGN AND DRAWING BASED ON MARYLAND COORDINATE SYSTEM:
HORIZONTAL - NAD 83 VERTICAL - NAVD 88

PS-02 ROADWAY PLAN
SEMINARY ROAD
INTERSECTION IMPROVEMENTS

MONTGOMERY COUNTY
DEPARTMENT OF TRANSPORTATION
GAITHERSBURG, MARYLAND

RECOMMENDED FOR APPROVAL

DATE: NOVEMBER 2017

Project No.: 501302

SHEET 17 OF 123

THE MARYLAND NATIONAL CAPITAL PARK AND PLANNING COMMISSION, DEPARTMENT OF PARKS AND PLANNING


MAJPC PERMIT NO. 2016-013

APPROVED BY: William Payton

DATE APPROVED: 06/19/2018

THIS IS NOT A PERMIT TO BEGIN CONSTRUCTION

This approval is for technical review only. For permit information, contact the DCPL, Construction Supervisor at (301) 456-2574.

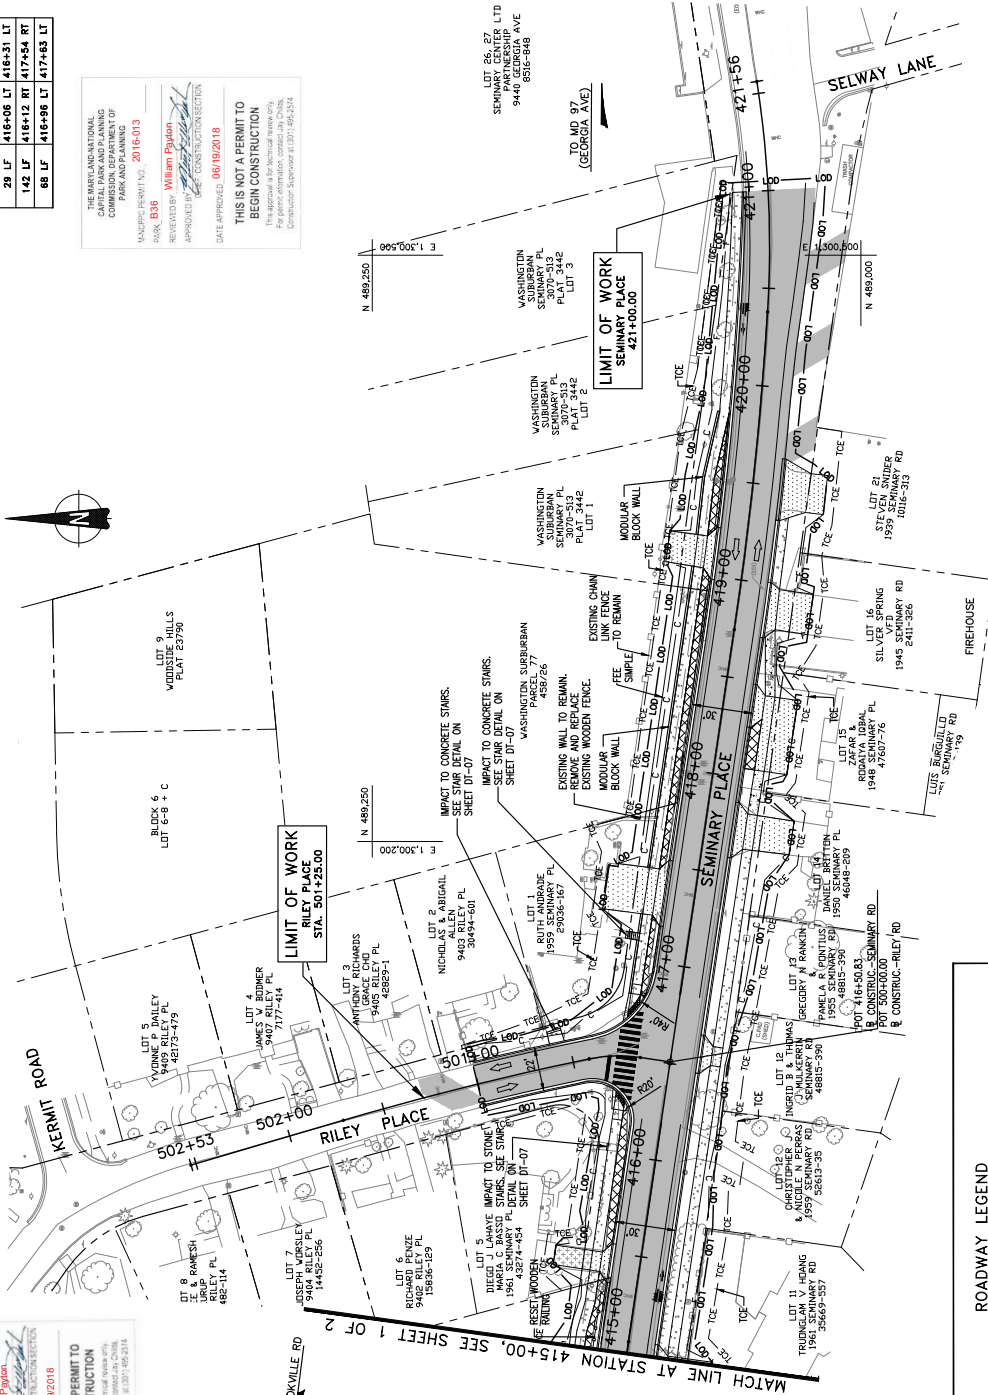

ROADWAY LEGEND

- WEDGE & LEVEL
- FULL DEPTH PAVEMENT
- 2" GRIND & RESURFACE
- REMOVE EXISTING PAVEMENT
- PROPOSED TRAFFIC FLOW
- EXISTING TRAFFIC FLOW
- 7" CONCRETE DRIVEWAY
- 7" ASPHALT DRIVEWAY
- 5" CONCRETE SIDEWALK
- 5" ASPHALT SIDEWALK

